

KORYO

BIAS TIRE



OFF THE ROAD OTR

Size	Ply Rating	Type	RIM		Tread Depth	Section Width	Overall Diameter	Max. load kg	At Cold		At Speed
			Measuring	Permitted					KPa	kgf/cm ²	
17.5-25	16	TT/TL	14.00/1.5	14.00/1.3	24	445	1350	7300	475	4.75	10km/h
17.5-25	20	TT/TL	14.00/1.5	14.00/1.3	24	445	1350	8250	575	5.75	10km/h
20.5-25	16	TT/TL	17.00/2.0	/	26	520	1490	8250	330	3.2	10km/h
20.5-25	20	TT/TL	17.00/2.0	/	26	520	1490	9500	450	4.5	10km/h
20.5-25	24	TT/TL	17.00/2.0	/	26	520	1490	10300	525	5.25	10km/h
23.5-25	20	TT/TL	19.50/2.5	/	29	595	1615	10900	375	3.75	10km/h
23.5-25	24	TT/TL	19.50/2.5	/	29	595	1615	12500	475	4.75	10km/h



EMT507/E
EMT501

OFF THE ROAD OTR

Size	Ply Rating	Type	RIM		Tread Depth	Section Width	Overall Diameter	Max. load kg	At Cold	
			Measuring	Permitted					KPa	kgf/cm ²
8.25-16	14	TT	6.50H	/	16	235	855	1360	450	4.5
12.00-16	14	TT	8.5	/	18	285	875	1550	420	4.2
20.5/70-16	14	TT	8.5	/	19	330	930	1600	625	6.25
13.00-25	28	TT	8.50/1.3	/	28.5	350	1300	10000	950	9.5
16/70-20	14	TT	13.00	/	31.5	410	1075	2925	350	3.5
16/70-24	14	TT	13.00	/	27	410	1175	3250	350	3.5



EMT168

OTR FOR MINE

Size	Ply Rating	Speed Symbol	RIM		Tread Depth	Section Width	Overall Diameter	Max. load kg	At Cold	
			Measuring	Permitted					KPa	kgf/cm ²
8.25-20	16	A8	6.5	6.50T,7.0,7.00T	24.5	236	974	S2430 D2180	910 840	9.1 8.4
9.00-20	16	A8	7.0	6.50T,7.5,6.5,7.50V	26	259	1018	S2900 D2500	880 810	8.8 8.1
10.00-20	18	A8	7.5	7.50V,8.0	29.5	278	1055	S3350 D2900	910 840	9.1 8.4
11.00-20	18	A8	8.0	8.00V,8.5	29.5	293	1085	S3650 D3150	910 840	9.1 8.4
12.00-20	18	A8	8.5	8.50V,9.00V	32	315	1125	S3730 D3270	810 740	8.1 7.4



ORT568

OTR FOR MINE

Size	Ply Rating	Speed Symbol	RIM		Tread Depth	Section Width	Overall Diameter	Max. load kg	At Cold	
			Measuring	Permitted					KPa	kgf/cm ²
6.50-16	12	B	5.50F	5.00E	17	185	750	S1060 D925	630	6.3
6.50-16	12	B	5.50F	5.00E	14	18	750	S1060 D925	630	6.3
7.00-16	16	B	5.50F	6.00G	16.5	200	775	S1350 D1215	770	7.7
7.00-16	16	B	5.50F	6.00G	14	200	775	S1350 D1215	770	7.7
7.50-16	16	B	6.00G	5.50F	18	215	805	S1550 D1370	770	7.7
7.50-16	16	B	6.00G	5.50F	14	215	805	S1550 D1370	770	7.7
8.25-16	16	B	6.50H	6.00G,6.5	19.5	235	855	S1800 D1600	730	7.3


ORT588/☆

PORT TRAILER TIRE

Size	Ply Rating	Speed Symbol	RIM		Tread Depth	Section Width	Overall Diameter	Max. load kg	At Cold	
			Measuring	Permitted					KPa	kgf/cm ²
10.00-20	14	K	7.5	7.50V 8	11.5	278	1055	S2800 D2430	700 630	7.0 6.3


MTT801

PORT TRAILER TIRE

Size	Ply Rating	Type	Speed Symbol	RIM		Tread Depth	Section Width	Overall Diameter	Max. load kg	At Cold	
				Measuring	Permitted					KPa	kgf/cm ²
11-22.5	14	TL	K	8.25	/	11.5	279	1054	S2800 D2430	690 620	6.9 6.2


MTT802

MOBILE HOME TIRE

Size	Ply Rating	Type	Speed Symbol	RIM		Section Width	Overall Diameter	Max.load kg	At Cold	
				Measuring	Permitted				KPa	kgf/cm ²
8-14.5	12	TL	F	6.00MH	/	203	707	1285	690	6.9
8-14.5	14	TL	F	6.00MH	/	203	707	1400	720	7.2


LTT807

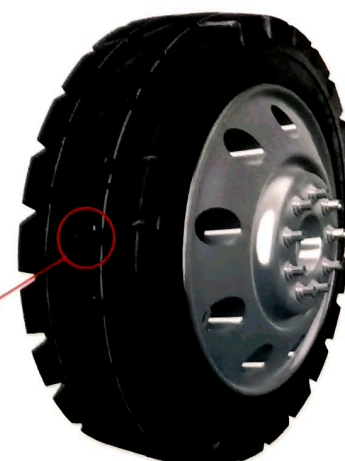
INDUSTRIAL PNEUMATIC TIRE

Size	Ply Rating	Speed Symbol	RIM		Tread Depth	Section Width	Overall Diameter	Max.load kg	At Cold	
			Measuring	Permitted					KPa	kgf/cm ²
6.00-9NHS	10	A5	4.00E	4.50E	12.5	160	540	1275	860	8.6
6.50-10NHS	10	A5	5.00E	5.50F	16	175	590	1400	790	7.9
7.00-9NHS	10	A5	5.00S	/	14	190	590	1685	860	8.6
7.00-12NHS	12	A5	5.00S	5.50S	15	190	676	2375	860	8.6
8.25-12NHS	12	A5	6.5	5.00S	18.5	235	765	3060	720	7.2
8.25-15NHS	14	A5	6.5	6.50T	18	235	840	3775	830	8.3
28x9-15NHS	14	A5	7	7.00T	18	220	710	3050	970	9.7


ITT518

INDUSTRIAL PNEUMATIC TIRE

Size	Ply Rating	Speed Symbol	RIM		Tread Depth	Section Width	Overall Diameter	Max.load kg	At Cold	
			Measuring	Permitted					KPa	kgf/cm ²
6.50-10NHS	10	A5	5.00E	5.50F	12.5	175	590	1400	790	7.9
28x9-15NHS	14	A5	7	7.00T	16.5	220	710	3050	970	9.7


ITT517



INDUSTRIAL PNEUMATIC TIRE

Size	Ply Rating	Speed Symbol	RIM		Tread Depth	Section Width	Overall Diameter	Max. load kg	At Cold	
			Measuring	Permitted					KPa	kgf/cm ²
5.00-8NHS	8	A5	3.50D	3.00D	10.5	137	470	845	790	7.9



ITT558

INDUSTRIAL PNEUMATIC TIRE

Size	Ply Rating	Type	Speed Symbol	RIM		Tread Depth	Section Width	Overall Diameter	Max. load kg	At Cold	
				Measuring	Permitted					KPa	kgf/cm ²
10-16.5NHS	10	TL	-	8.5	-	19.5	175	590	2135	520	5.2
12-16.5NHS	12	TL	-	9.75	-	19.5	220	710	2865	550	5.5



TF303

INDUSTRIAL SOLID TIRE

Size	Ply Rating	Load Index	RIM		Tread Depth	Section Width	Overall Diameter
			Measuring	Permitted			
6.50-10 NHS	/	/	5.0S	/	24.5	156	571
28x9-15NHS/ 8.15-15 NHS	/	/	7.0	/	25.5	206	692.5



ITT568

FIRE ENGINE TIRE

Size	Ply Rating	Speed Symbol	RIM		Tread Depth	Section Width	Overall Diameter	Max.load kg	At Cold	
			Measuring	Permitted					KPa	kgf/cm ²
36×13.5-19.5	16	G	9.75	-	20	343	915	2905	760	7.6



TF305

LIGHT SUV TIRE

Size	Ply Rating	Speed Symbol	RIM		Tread Depth	Section Width	Overall Diameter	Max.load kg	At Cold	
			Measuring	Permitted					KPa	kgf/cm ²
7.50-16	8	J	6.00G	5.50F 6.50H	16	215	805	S1190 D1120	425	4.25
7.50-16	12	J	6.00G	5.50F 6.50H	16	215	805	S1440 D1370	600	6.0
7.50-16	14	J	6.00G	5.50F 6.50H	16	215	805	S1500 D1400	770	7.7



TF301